


Concrete saw blade

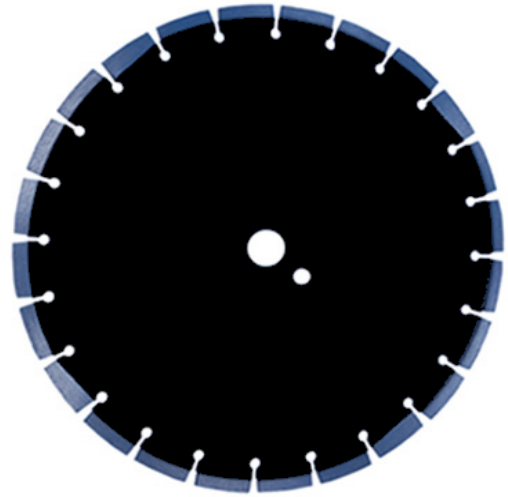

Specifications:

Item NO.	Diameter		Bore size(mm/inch)	Segment thickness(mm)	Segment height(mm)
	mm	inch			
CL300SM	300	12"	25.4/1"	3.0	10/12
CL350SM	350	14"	25.4/1"	3.2	10/12
CL400SM	400	16"	25.4/1"	3.6	10/12
CL450SM	450	18"	25.4/1"	3.8	10/12
CL500SM	500	20"	25.4/1"	4.0	10/12
CL600SM	600	24"	25.4/1"	4.5	10/12
CL650SM	650	26"	25.4/1"	4.5	10/12
CL700SM	700	28"	25.4/1"	4.5	10/12
CL750SM	750	30"	25.4/1"	4.5	10/12
CL800SM	800	32"	25.4/1"	4.5	10/12
CL900SM	900	36"	25.4/1"	4.5-6.0	10/12
CL1000SM	1000	40"	25.4/1"	5.5-6.0	10/12
CL1100SM	1100	44"	25.4/1"	5.5-6.0	10/12
CL1200SM	1200	48"	25.4/1"	5.5-7.0	10/12

Contact us:

XMF Tools Group 

Ad: 312 YanZhao Noth Street
ZhengDing County
HeBei P R China

Post Code: 050800

TEL: 86-311-85174190
85174259,85174229

FAX: 86-311-85174239

E-mail: xmf@xmftools.com

Features: These diamond blades feature tough wear-resistant bonds and hard metal undercutting protection

Application: Cured concrete

Machinery: Walk behind saw, flat saw

Different arbor sizes and segment specifications are available upon request