


## Concrete saw blade

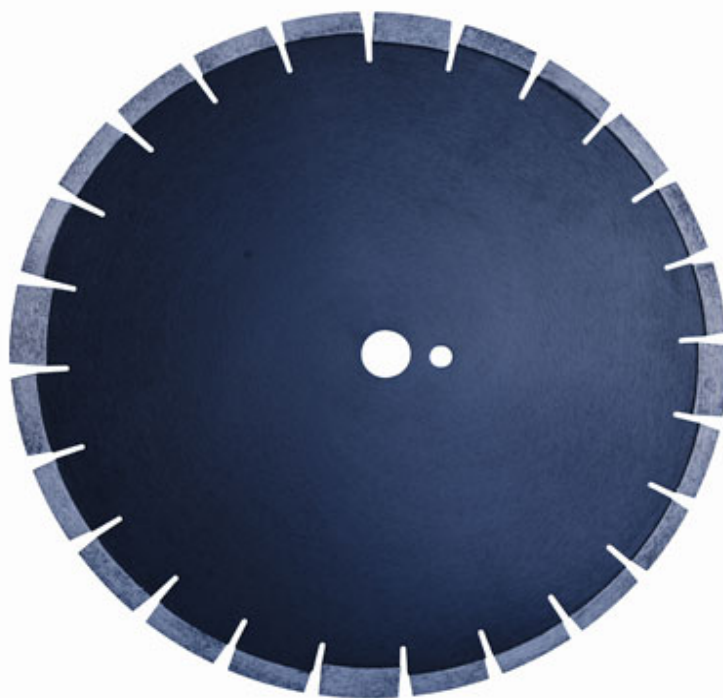

### Specifications:

Item NO.	Diameter		Bore size(mm/inch)	Segment thickness(mm)	Segment height(mm)
	mm	inch			
CL300SH	300	12"	25.4/1"	3.0	10/12
CL350SH	350	14"	25.4/1"	3.2	10/12
CL400SH	400	16"	25.4/1"	3.6	10/1H
CL450SH	450	18"	25.4/1"	3.8	10/12
CL500SH	500	20"	25.4/1"	4.0	10/12
CL600SH	600	24"	25.4/1"	4.5	10/12
CL650SH	650	26"	25.4/1"	4.5	10/12
CL700SH	700	28"	25.4/1"	4.5	10/12
CL750SH	750	30"	25.4/1"	4.5	10/1H
CL800SH	800	32"	25.4/1"	4.5	10/12
CL900SH	900	36"	25.4/1"	4.5-6.0	10/12
CL1000SH	1000	40"	25.4/1"	5.5-6.0	10/12
CL1100SH	1100	44"	25.4/1"	5.5-6.0	10/12
CL1200SH	1200	48"	25.4/1"	5.5-7.0	10/12

### Contact us:

**XMF Tools Group** 

**Ad:** 312 YanZhao North Street  
ZhengDing County  
HeBei P R China

**Post Code:** 050800

**TEL:** 86-311-85174190  
85174259,85174229

**FAX:** 86-311-85174239

**E-mail:** xmf@xmftools.com

**Features:** These diamond blades deliver excellent stability, high speed cutting action and durable blade life

**Application:** Concrete, hard concrete and concrete with reinforced bar

**Machinery:** Walk behind saw, flat saw

Different arbor sizes and segment specifications are available upon request