


Concrete saw blade

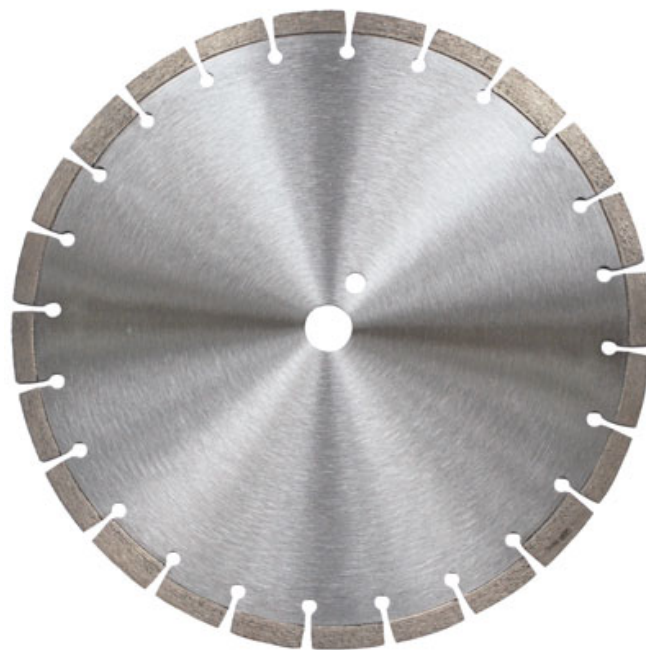

Specifications:

Item NO.	Diameter		Bore size(mm/inch)	Segment thickness(mm)	Segment height(mm)
	mm	inch			
CS300SW	300	12"	25.4/1"	3.0	10/12
CS350SW	350	14"	25.4/1"	3.2	10/12
CS400SW	400	16"	25.4/1"	3.6	10/12
CS450SW	450	18"	25.4/1"	3.8	10/12
CS500SW	500	20"	25.4/1"	4.0	10/12
CS600SW	600	24"	25.4/1"	4.5	10/12
CS650SW	650	26"	25.4/1"	4.5	10/12
CS700SW	700	28"	25.4/1"	4.5	10/12
CS750SW	750	30"	25.4/1"	4.5	10/12
CS800SW	800	32"	25.4/1"	4.5	10/12
CS900SW	900	36"	25.4/1"	4.5-6.0	10/12
CS1000SW	1000	40"	25.4/1"	5.5-6.0	10/12
CS1100SW	1100	44"	25.4/1"	5.5-6.0	10/12
CS1200SW	1200	48"	25.4/1"	5.5-7.0	10/12

Contact us:

XMF Tools Group 

Ad: 312 YanZhao North Street
ZhengDing County
HeBei P R China

Post Code: 050800

TEL: 86-311-85174190
85174259,85174229

FAX: 86-311-85174239

E-mail: xmf@xmftools.com

Features: Diamond saw blade ideal for cutting cured concrete, with excellent cutting speed and long service life

Application: Cured concrete

Machinery: Walk behind saw, flat saw

Different arbor sizes and segment specifications are available upon request