


Green concrete saw blade

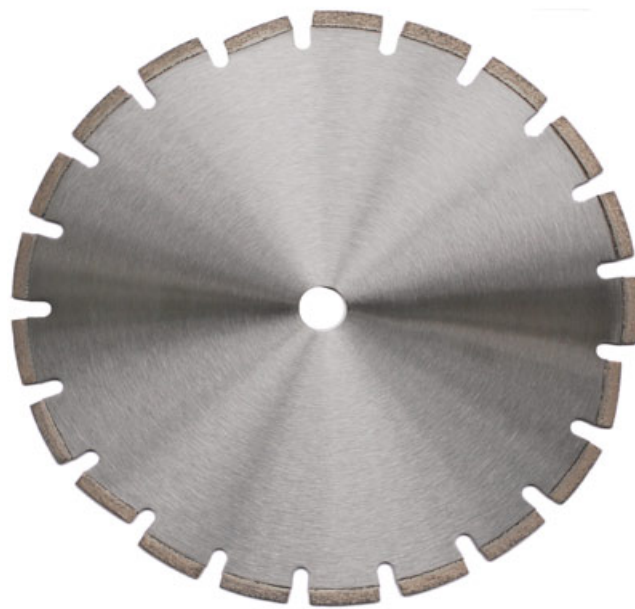

Specifications:

| Item NO. | Diameter | | Bore size(mm/inch) | Segment thickness(mm) | Segment height(mm) |
|----------|----------|------|-----------------------|--------------------------|-----------------------|
| | mm | inch | | | |
| CL300HM | 300 | 12" | 25.4/1" | 3.0 | 10/12 |
| CL350HM | 350 | 14" | 25.4/1" | 3.2 | 10/12 |
| CL400HM | 400 | 16" | 25.4/1" | 3.6 | 10/12 |
| CL450HM | 450 | 18" | 25.4/1" | 3.8 | 10/12 |
| CL500HM | 500 | 20" | 25.4/1" | 4.0 | 10/12 |
| CL600HM | 600 | 24" | 25.4/1" | 4.5 | 10/12 |
| CL650HM | 650 | 26" | 25.4/1" | 4.5 | 10/12 |
| CL700HM | 700 | 28" | 25.4/1" | 4.5 | 10/12 |
| CL750HM | 750 | 30" | 25.4/1" | 4.5 | 10/12 |
| CL800HM | 800 | 32" | 25.4/1" | 4.5 | 10/12 |
| CL900HM | 900 | 36" | 25.4/1" | 4.5-6.0 | 10/12 |
| CL1000HM | 1000 | 40" | 25.4/1" | 5.5-6.0 | 10/12 |
| CL1100HM | 1100 | 44" | 25.4/1" | 5.5-6.0 | 10/12 |
| CL1200HM | 1200 | 48" | 25.4/1" | 5.5-7.0 | 10/12 |

Contact us:

XMF Tools Group 

Ad: 312 YanZhao North Street
ZhengDing County
HeBei P R China

Post Code: 050800

TEL: 86-311-85174190
85174259,85174229

FAX: 86-311-85174239

E-mail: xmf@xmftools.com

Features: These diamond blades feature tough wear-resistant bonds and hard metal undercutting protection

Application: Green concrete, asphalt

Machinery: Walk behind saw, flat saw

Different arbor sizes and segment specifications are available upon request