



Turbo cup wheel

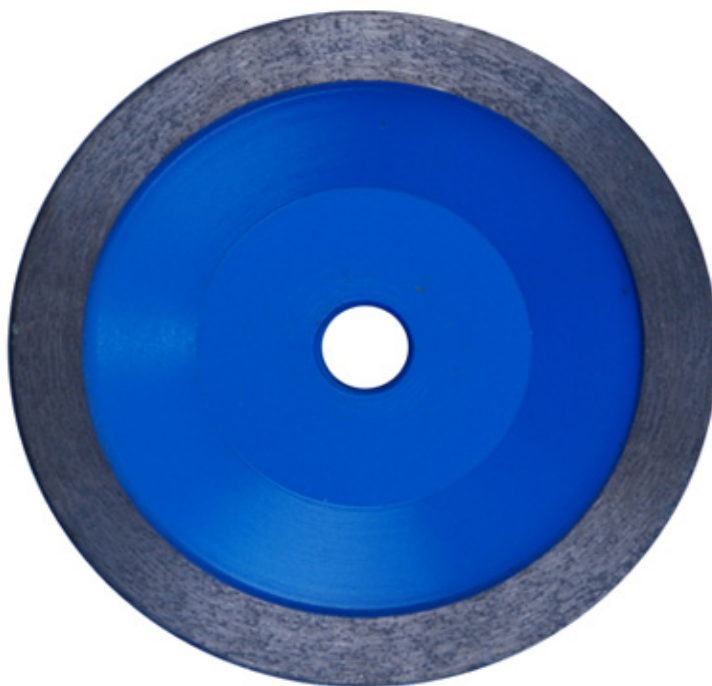

Specifications:

Item NO.	Diameter		Bore size(mm/inch)	Segment thickness(mm)	Segment height(mm)
	mm	inch			
WS105CH	105	4"	16/22.23 5/8"/7/8"	6	11
WS115CH	115	4.5"	16/22.23 5/8"/7/8"	7.5	18
WS125CH	125	5"	16/22.23 5/8"/7/8"	7.5	18
WS150CH	150	6"	16/22.23 5/8"/7/8"	8	18
WS180CH	180	7"	16/22.23 5/8"/7/8"	8	18

Contact us:

XMF Tools Group 

Ad: 312 YanZhao North Street
ZhengDing County
HeBei P R China

Post Code: 050800

TEL: 86-311-85174190
85174259,85174229

FAX: 86-311-85174239

E-mail: xmf@xmftools.com

Feature: The sintered continuous rim cup wheel is ideal for beveling, smoothing and shaping

Application: Granite, marble, brick, block

Machinery: Angle grinder

Different arbor sizes and segment specifications are available upon request