


Tuck point



Contact us:

XMF Tools Group

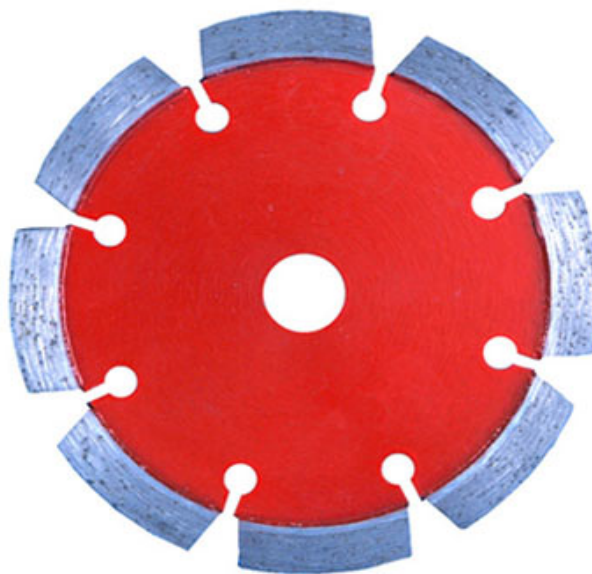

Ad: 312 YanZhao North Street
ZhengDing County
HeBei P R China

Post Code: 050800

TEL: 86-311-85174190
85174259,85174229

FAX: 86-311-85174239

E-mail: xmf@xmftools.com

| Item No. | Diameter | | Bore | Segment | Segment |
|----------|----------|------|---------------|---------------|------------|
| | mm | inch | size(mm/inch) | thickness(mm) | height(mm) |
| TP105SH | 105 | 4" | 22.23/0.875" | 6.35 | 10 |
| TP115SH | 115 | 4.5" | 22.23/0.875" | 6.35 | 10 |
| TP125SH | 125 | 5" | 22.23/0.875" | 6.35 | 10 |
| TP150SH | 150 | 6" | 22.23/0.875" | 6.35 | 10 |
| TP180SH | 180 | 7" | 22.23/0.875" | 6.35 | 10 |

Feature: The tuck point is for fast, efficient mortar removal, grout repair and cleaning of concrete applications

Application: Mortar and concrete removal

Machinery: Angle grinder, tuck pointer

Different arbor sizes and segment specifications are available upon request